



PLAIN

# PLAIN



36-44%  
EN ISO 14021







Recycled Content



87%  
EN ISO 7742-2 & 3

Light Reflectance

## PLAIN


|                    | BOARD   | TEGULAR   | MICROLOOK   |
|--------------------|---|---|---|
|                    | <br>Prelude XL <sup>2</sup> /TLX 24 mm<br>Prelude Sixty <sup>2</sup> | <br>Prelude XL <sup>2</sup> /TLX 24 mm<br>Prelude Sixty <sup>2</sup> | <br>Prelude XL <sup>2</sup> /TL 15 mm<br>Interlude XL <sup>2</sup> 15 mm |
|                    |    |    |    |
| 600 x 600 x 15 mm  | 9587 M  | 9589 M  | 9590 M  |
| 625 x 625 x 15 mm  | 9587 D  | 9589 D  | 9590 D  |
| 600 x 1200 x 15 mm | 9588 M  |   |   |
| 625 x 1250 x 15 mm | 9588 D  |   |   |



EN ISO 354 &  
EN ISO 11654

| $\alpha_w$     | NRC  | 125  | 250  | 500  | 1000 | 2000 | 4000 | Hz         |
|----------------|------|------|------|------|------|------|------|------------|
| <b>0.20(L)</b> | 0.20 | 0.30 | 0.25 | 0.15 | 0.15 | 0.25 | 0.30 | $\alpha_p$ |

Class = E

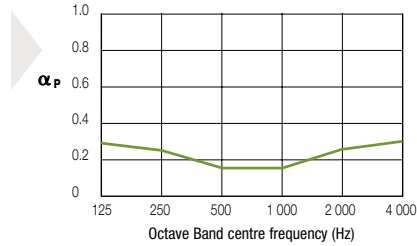

EN ISO 10848-2  
& EN 717-1

|                        |  |
|------------------------|--|
| <b>D<sub>nfw</sub></b> |  |
| <b>35 dB</b>           |  |



EN 13501-1

EEA Euroclass A2-s1, d0

RUS KM1 (G1, V1, D1, T1) FZ 123



EN 12667  
& ISO 8301

$\lambda = 0.06$  W/m K



95 % RH



15 YEAR  
guarantee



4 kg/m<sup>2</sup>



Please contact our Armstrong Technical Sales Group for further details.