

DUNE SUPREME/
DUNE VECTOR



www.armstrong-ceilings.co.uk
www.armstrong-ceilings.ie



DUNE SUPREME/ DUNE VECTOR



DUNE SUPREME/ DUNE VECTOR

	BOARD	TEGULAR	MICROLOOK	VECTOR
	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TL 15 mm Interlude XL ² 15 mm	 Prelude XL ² 24 mm Prelude Sixty ²
DUNE			9813 M	3321 M
500 x 500 x 15 mm				
600 x 600 x 19 mm				
1200 x 300 x 15 mm			2020 M	
1200 x 600 x 15 mm		9687 M	2727 M	
DUNE SUPREME				
600 x 600 x 15 mm	2271 M	2273 M	2274 M	
600 x 1200 x 15 mm	2272 M			
DUNE SUPREME Unperforated				
600 x 600 x 15 mm	2276 M	2278 M	2279 M	
600 x 1200 x 15 mm	2277 M			




COLORTONE DUNE: Carrara (CA), Platinum (PN), Blue Mountain (BT).



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz	
• DUNE SUPREME (Board/Tegular/MicroLook)									
0.55	0.50	0.40	0.45	0.55	0.60	0.50	0.45		α_p
Sound Absorption Class = D									
• DUNE (Board/Tegular/MicroLook)									
0.55	0.50	0.40	0.40	0.55	0.55	0.50	0.45		α_p
Sound Absorption Class = D									
• DUNE Vector									
0.65	0.65	0.50	0.55	0.55	0.70	0.70	0.60		α_p
Sound Absorption Class = C									
• DUNE SUPREME Unperforated Board/Tegular/MicroLook									
0.15(L)	0.20	0.40	0.30	0.15	0.15	0.15	0.25		α_p
Sound Absorption Class = E									

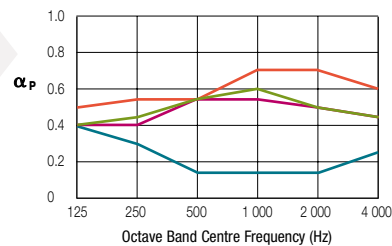

EN ISO 10848-2
/ EN 2014069
& EN ISO 717-1

Dncw 35 dB (DUNE SUPREME/DUNE and DUNE SUPREME Unperforated)
Dnfw 35 dB (DUNE Vector)



EN ISO 140-3
& EN ISO 717-1

Rw 17 dB (DUNE SUPREME)



EN 13501-1

EEA Euroclass A2-s1, d0
RUS KM1 (G1, V1, D1, T1) FZ 123

USA ASTM E84: Flame Spread Index ≤ 25; Smoke Developed Index ≤ 50
ASTM E1264: Class A



EN 12667
& ISO 8301

$\lambda = 0.06$ W/m K



99 % RH (DUNE SUPREME)
95 % RH (DUNE VECTOR)

LIFE TIME
guarantee



3.7 kg/m² (DUNE SUPREME)
≈ 6.2 kg/m² (DUNE Vector)

* DUNE SUPREME / DUNE SUPREME Unperforated = 42%, DUNE Vector = 31%. **DUNE = 84%, DUNE SUPREME Unperforated = 85%.

Please contact our Armstrong Technical Sales Group for further details.